



NEURO LOGIC
SYSTEMS

RFT2-3LH-24

Rackmount 3U Triple 24" LCD Display



KEY FEATURES


- Gas struts to support the LCD in heavy vibration
- Ruggedized *General Devices* rackslides
- Thumbscrews to lock tray to rack when closed
- NEMA sealed LCD fronts
- 15-pin VGA or DVI video inputs
- PFC power supply with MIL circular input connector
- Optional: Sealed, backlit full-travel Keyboard
- Fits 24" to 36" rack depths via adjustable mounting brackets (specs)
- 28 and 48-volt DC and 400Hz power supply options



MADE IN THE USA

- Impact resistant glass AR filters
- 2-Year Parts and Labor Warranty
- See product video at:
www.youtube.com/NLSdisplays

RFT2-3LH-24: Rackmount 3U Triple 24" LCD Display

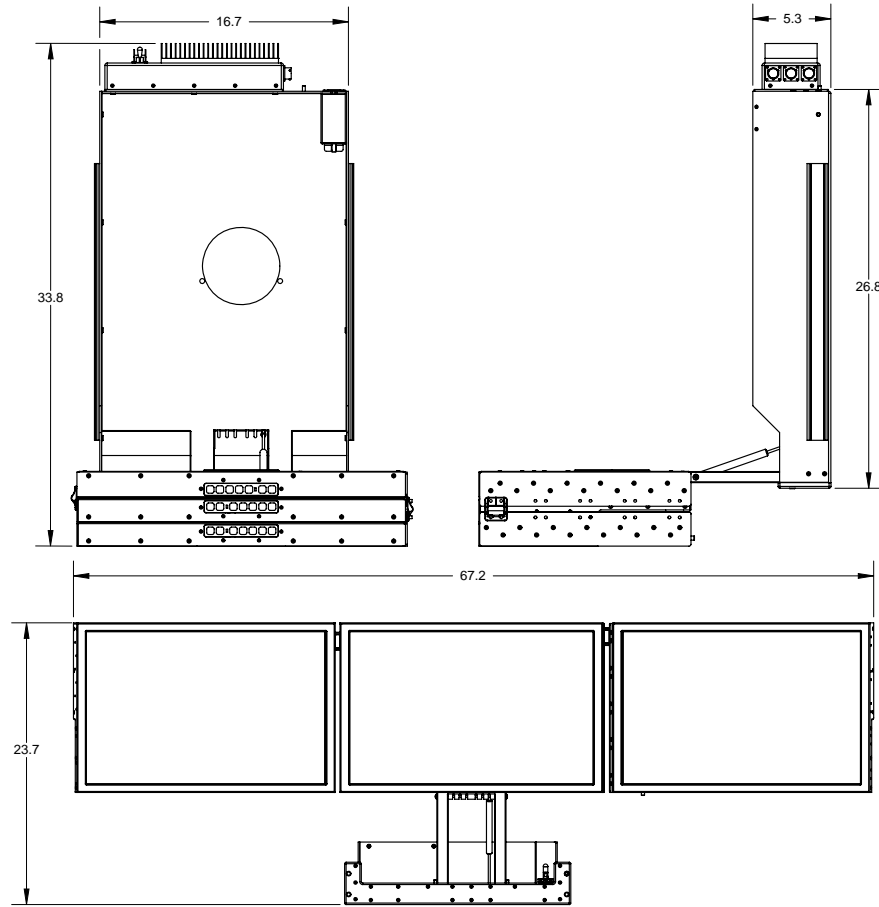

LCD TECHNOLOGY

LCD Technology:

- Active matrix TFT color LCD
- 24.1 " diagonal screen size
- 1920 x 1200 maximum resolution
- 0.294mm x 0.294mm pixel pitch
- 400cd/m² (typ.) brightness
- 1,000:1 (typ.) contrast ratio
- L/R=80° / 80°, U/D=70° / 70° viewing angle

Display Resolution:

- 1920 pixels(H) x 1200 lines(V)

Displayable Color: 16.7M colors

Auto-adjustment: Yes

I/O Connectors:

- VGA
- DVI/HDMI
- HD-SDI or RS-170 optional

User Controls:

- Multilingual on screen menu adjustments
- External adjustment button
- Screen image control items
 - Auto-adjustment
 - Contrast
 - Horizontal position
 - Vertical position
 - Frequency
 - Tracking
 - Display mode
 - OSD off-time
 - Language
 - Reset volume
 - Color setting
 - Color adjustment (RGB)

Power Input.:

- 90-240V, 50-60Hz

Power Consumption:

- 80 watt (max.)
- 90-260VAC @ 50/60Hz

Operating Temp.:

- 0°-50°C / 32°-122°F . Humidity: 95% max

Storage Temp.:

- -20°-60°C / -4°-140°F . Humidity: 95% max

MTBF: 40,000 hours

Power Supply Options:

- DC 12/24/48 Volt & 400Hz

Mil Specs: Optional: 461E

Weight: 42lbs.

www.NLSdisplays.com

Sales and Product : sales@nlsdisplays.com

